




Stepper motor **SM8680** – serial connection

Controller: **SMSD-8.0**

Microstepping: 1/2

Current: 4.5A

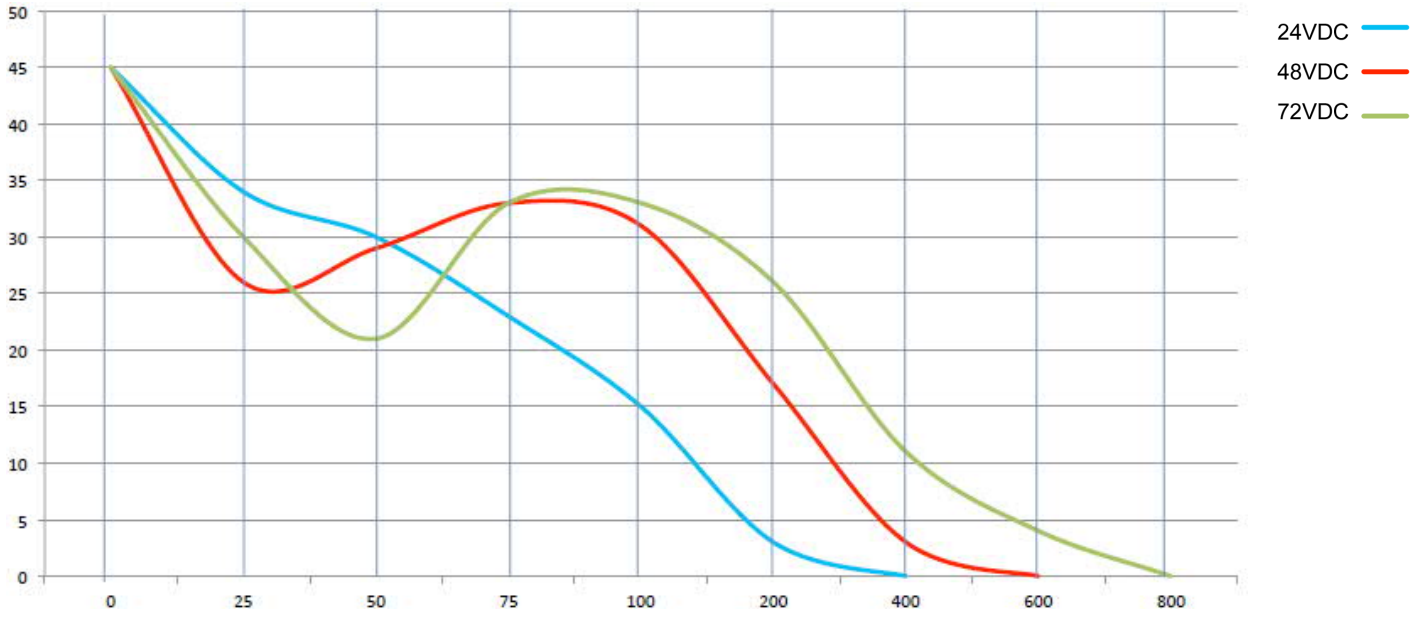

x axis - rotation speed, rpm;

y axis - torque, kgf*cm