

LD3-12-05-K3 LD3-24-05-K3

LINEAR ACTUATOR




The LD3 linear actuators with gear ratio 1:5 feature a compact design, ideal for applications where there is limited space available for the actuator. High motion speed is highly appreciated in highly dynamic systems. Optional built-in Hall sensors make it possible to position and stabilize the speed of the actuator.

Technical parameters


Voltage	12 - 24 VDC
Push/pull force	150 N
Rated speed	36.5 mm/s
Stroke	50 – 300 mm
Hall sensors	optional

Load diagrams

Speed/load diagram of linear actuators
LD3-12-05-K3 / LD3-24-05-K3

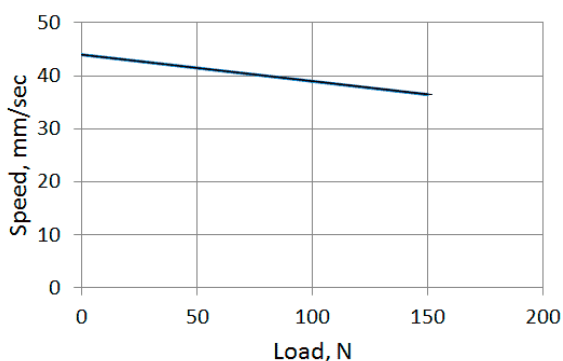

Current/load diagram of linear actuators
LD3-12-05-K3 / LD3-24-05-K3

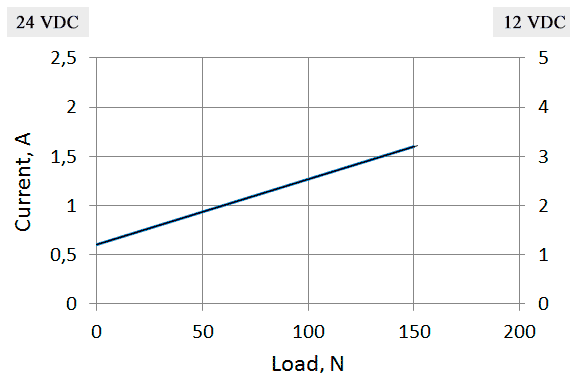


Dimensions

Stroke (S)	50	100	150	200	250	300
Length A, mm	158	209	260	311	362	413
Length B, mm	208	309	410	511	612	713



Linear actuator without Hall sensors

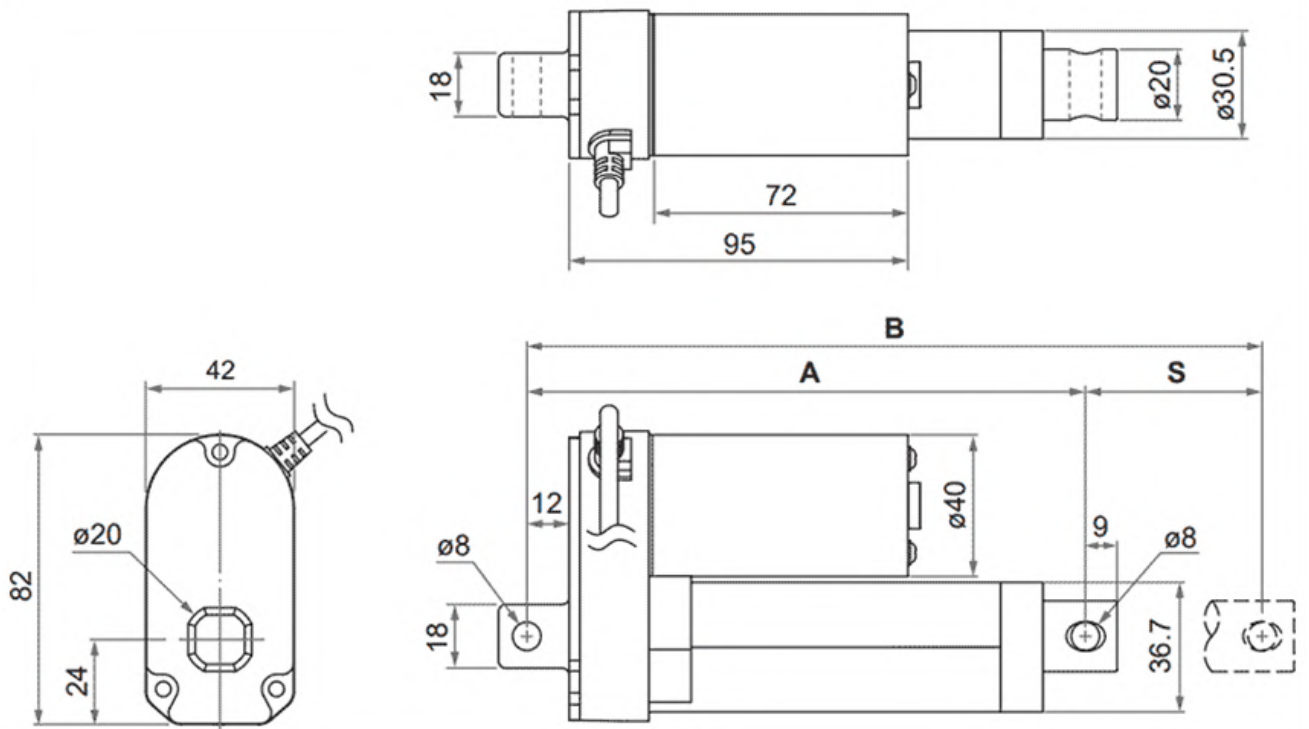

Linear actuator without Hall sensors

